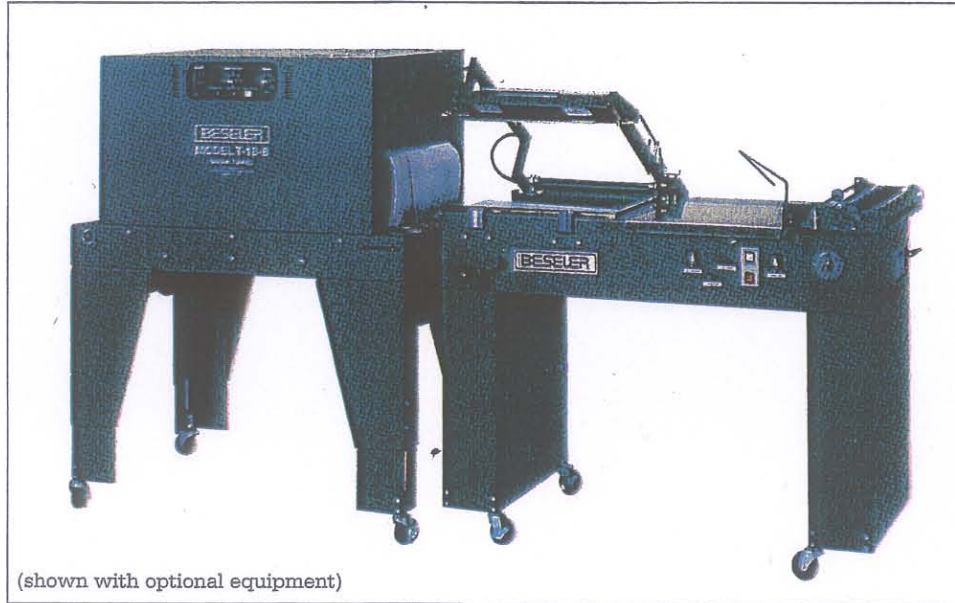


**2016-MTB-II SEALER/TD-18-8-M TUNNEL SYSTEM****System Features**

- 20" x 16" seal area
- Self-adjusting seal pads
- Fully welded heavy steel frame
- 15-18 packages per minute
- Automatic dual magnets
- Variable speed soft start conveyor
- Stainless steel film hold downs
- Film tension brake
- Easy quick change Mono seal wire
- Fully welded seal head
- Stainless steel product loading tray
- 24 Pin Micro Perforator
- Hot Knife Option
- 18" wide 8" tall 36" long tunnel chamber
- Adjustable air dampers
- Dual high velocity/volume blowers
- Heat ducted to all sides, top and bottom
- Automatic cool down circuit
- Digital P.I.D. temperature control
- Variable speed 0-120 fpm conveyor
- No maintenance mesh belt
- Durable electro-static powder finish
- 8000 watts of available heat
- ONE YEAR WARRANTY (including seal wire)

MODEL	MACHINE SIZE L x W x H	SHIPPING SIZE/WEIGHT	POWER REQUIRED	SEAL AREA TUNNEL AREA	PACKAGES PER MINUTE	MAXIMUM PRODUCT SIZE
2016-MTB-II L-SEALER	56" x 30" x 35"	73" x 52" x 59" 402 LBS.	115 VOLTS 15 AMPS.	20" x 16" L x W	15-18	19" x 15" L x W
TD-18-8-M TUNNEL	44" x 30" x 52"	73" x 52" x 59" 475 LBS.	220 VOLTS 1PH 40 AMPS	18" x 8" x 36" W x H x L	30-40	17" x 7" W x H

**BESELER PACKAGING MACHINERY DIVISION**